



# IPB-Z35805S

8 MP 5X IR Network Speed Dome



## ■ Features

- H.265+/H.265/H.264 8MP IP/Network IR Bullet Camera
- Up to 8 megapixel high resolution
- Max. 3840\*2160@20fps(50HZ/60HZ)/3072\*2048/2592\*1944/2560\*1440/
- 2048\*1536/2304\*1296/1080P/960P/720P/D1@25fps/30fps(50HZ/60HZ)
- Support RTSP&Onvif(2.4+Media2 Version)
- Compatible with many third-party NVRs and CMS
- Support multiply Web Browsers: IE/Firefox/Chrome/Safari etc.
- P2P Cloud service
- Free PC Client Software and Smartphone APP(P2P)
- Support Alarm Snapshot to Email and FTP
- Day/Night, AWB/MWB,BLC, 3D-DNR,Shutter, IR-CUT
- D-WDR,Mirror, Image Flip etc. Functions
- Audio in/out Optional (RCA Cable Interface)
- 12V DC (PoE Optional)
- 2.7~13.5mm 5X motor lens
- IR range: up to 35m
- Water-proof: IP66
- Pan:0~355°(45°/s)/Tilt:0~90°(25°/s)/Zoom 5X





## ■ Specification

### Camera

Image Sensor:	1/2.8" 8MP Progressive Scan CMOS
Signal System:	PAL/NTSC
Min. Illumination:	Color: 0.05lux @(F1.2, AGC ON), 0 lux with IR
Shutter Time:	1/25 s to 1/100,000 s
Lens:	2.7~13.5mm 5X motor lens
Day&Night:	IR cut filter with auto switch
Image Enhancement:	BLC/3D DNR/D-WDR
Motion Detection	Support
Privacy Protection	Support(4 Self-customized Areas)
Wather-Proof:	IP66
Illumination for Infrared Switching:	1~3Lux
Infrared Wavelength:	850nm
MinimumIllumination:	0 Lux(IR ON)
IR Range:	2pcs Strong LED, up to 30m
Compression Standard	
Video Compression:	H.265+/H.265/H.264/MJPEG
Video Bit Rate:	32Kbps~12Mbps(CBR/VBR Selectable)
Audio Compression:	G711U/G711A
Dual Streams:	Yes
Triple Streams:	/

### Image

Max. Image Resolution:	3840*2160(8MP)@20fps
Frame Rate:	Max.:3840*2160@20fps(50HZ/60HZ)/3072*2048/2592*1944/2560*1440/2048*1536/2304*1296/1080P/960P/720P/D1@25fps/30fps(50HZ/60HZ)
Sub Stream:	50Hz/60Hz: Max. (720*480/VGA/640*360/480*360/CIF)@25fps/30fps
Third Stream(Mobile Stream):	/
Image Settings:	3D NR, D-WDR, Image Flip, Saturation, Brightness, Contrast, Sharpness adjustable via client software, web browser or Smartphone App
Day/Night Switch:	Auto/Timing/External/Manual

### Network

Network Protocols:	HTTP, TCP/IP, IPv4, UPNP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS etc.
General Function:	Anti-Flicker, heartbeat, mirror, password protection, privacy mask, Watermark
System Compatibility:	ONVIF(2.4+ Media2)/Private
On-line Viewing	Max. Support 6 Users Simultaneously

### Interface

Communication Interface:	1 RJ45 10M / 100M Ethernet Interface
RCA Audio Interface:	RCA Audio input/output Interface (Optional)
DC Power Plug:	DC Power FemaleInterface

### General

Operating Conditions:	-10 °C ~ 60 °C Humidity 95% or less (non-condensing)
Power Supply:	12 V DC ± 10%/PoE(Optional)
Power Consumption:	12 VDC ± 10%, Max Power ConsumptionLess than 10W(When the infrared lamps turn on)
Weight:	0.98KG





## IPB-Z35805S


8 MP 5X IR Network Speed Dome

### ■ Available Model

IPB-Z35805S (5X)

### ■ Dimension

SIZE:mm

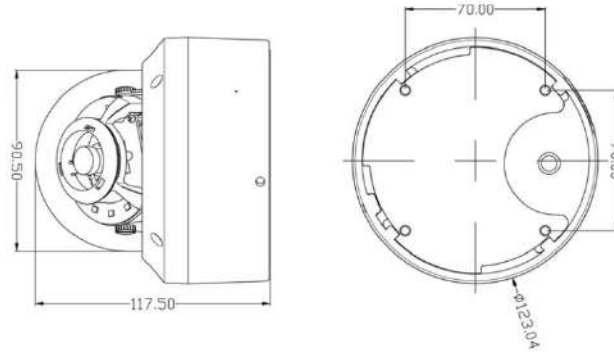

### ■ Accessory

### ■ Optional

ZJ-05



Uin Technology Co., Ltd.

+86-871 63586112

[www.uin-tech.com](http://www.uin-tech.com)

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

