



IPY-D368VUS

8 MP Color Vu Fixed Turret Network Camera



■ Features

- 1/2.8" Sony IMX415 CMOS sensor
- 8MP 4K UHD resolution 3840 x 2160 output
- Ultra low illumination 0.01Lux
- 24 hours color image view
- Day/Night, AWB, 2D/3D-DNR, IR-CUT,WDR/HDR
- Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 three-stream RTSP media server
- Easy-to-use P2P Cloud service
- Alarm snapshot to FTP and Email
- Storage to NAS via NFS protocol
- Youtube Live via RTMP Protocol
- Support user authentication, video data encryption, HTTPS security access
- Multiply WEB browser compatible, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 2 pcs smart warm light Led(3600K)
- Brightness auto adjust(0-100%) distance 20-30 meters
- Large F1.0 3.6 mm fixed lens
- Built-in Mic





■ Specification

Camera

| | |
|--------------------|--|
| Image Sensor | 1/2.8" 8MP IMX415 CMOS |
| Effective Pixels | 3840(H)×2160 (V) |
| Electronic Shutter | AUTO, 1/25s ~ 1/100000s, Manual |
| Min. Illumination | 0.001Lux F1.0(AGC ON) |
| Day/Night | Auto/Color/(B/W)/Timing |
| WDR | WDR/HDR |
| White Balance | Auto/Manual |
| AGC/BLC/HLC | Support |
| DNR | 2D/3D DNR |
| Other | Multi-lines OSD, Motion Detection, Privacy Mask, Mirror, shutter |

Encode

| | |
|------------------|---|
| Video Standard | H.264/H.265/H.265+ |
| Video Resolution | Main Stream:20fps@8MP(3840x2160),30fps@6MP(3072x2048)/5MP(2592x1944)/4MP/3MP,60fps@1080P/720P Sub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc. Third stream:10fps@1080P/720P/CIF |
| Video Bitrates | 64Kbps - 12Mbps, VBR/CBR |
| Audio Standard | G.711-u/G.711-a/AAC |
| Built-in Mic | Yes |
| OSD Overlay | Title and Time overlay |

Event Alarm

| | |
|----------------------|--|
| Human Detection | Yes |
| Motion Detection | Yes |
| Alarm Trigger Action | Snapshot/recording/APP alert/Email/FTP/Onvif |

Warm Fill-light Led

| | |
|----------|---------|
| Fill Led | |
| Distance | 20-30 M |

Lens

| | |
|--------------|--------------------------------------|
| Focal length | F1.0 large aperture 3.6mm fixed lens |
|--------------|--------------------------------------|

Network Services

| | |
|----------|--|
| Protocol | HTTP/HTTPS/RTSP/FTP/SMTP/DHCP/NTP/DST/NFS/RTMP |
| P2P | Yes |
| Web | IE Chrome Firefox Edge Safari |
| Media | LMS, Android, IOS |
| ONVIF | 17.06 compatible |

General

| | |
|-------------------|--|
| Language | English/Chinese/Russian/German/Italian/Korean/Turkish/Pakistan |
| Network Port | 1-RJ45, 100Mbps, PoE 48V in |
| Power Supply | 12 VDC ± 10% |
| Power Consumption | < 10 W |
| Operating Temp. | -30°C-(+60)°C, 10%-90%RH |
| Housing Material | Aluminum Metal |






IPY-D368VUS

8 MP Color Vu Fixed Turret Network Camera

■ Available Model

IPY-D365VUS IPY-D368VUS (2.8/3.6mm)

■ Dimension

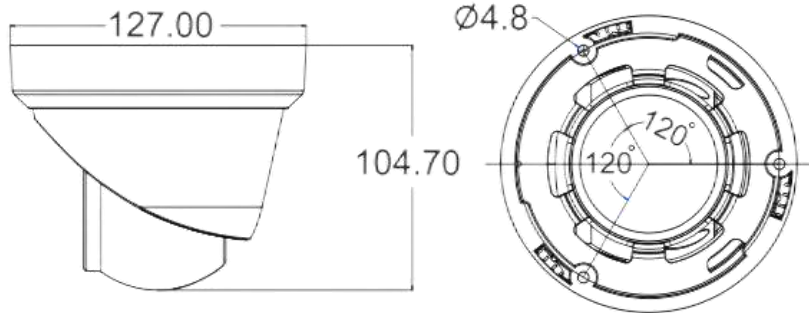

■ Accessory

■ Optional

ZJ-02



JB-04



Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

