

## DS-3E0510P-E/M 8 Port Gigabit Unmanaged PoE Switch



- 8 × Gigabit PoE ports, 1 × Gigabit RJ45 port, 1 × Gigabit SFP fiber optical port
- IEEE 802.3at/af standard
- IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab, and IEEE 802.3z standard
- 6 kV surge protection for PoE ports
- PoE power management
- Gigabit network access
- Wire-speed forwarding and non-blocking design
- Store-and-forward switching
- Solid high-strength metal shell
- Reliable fan-free design

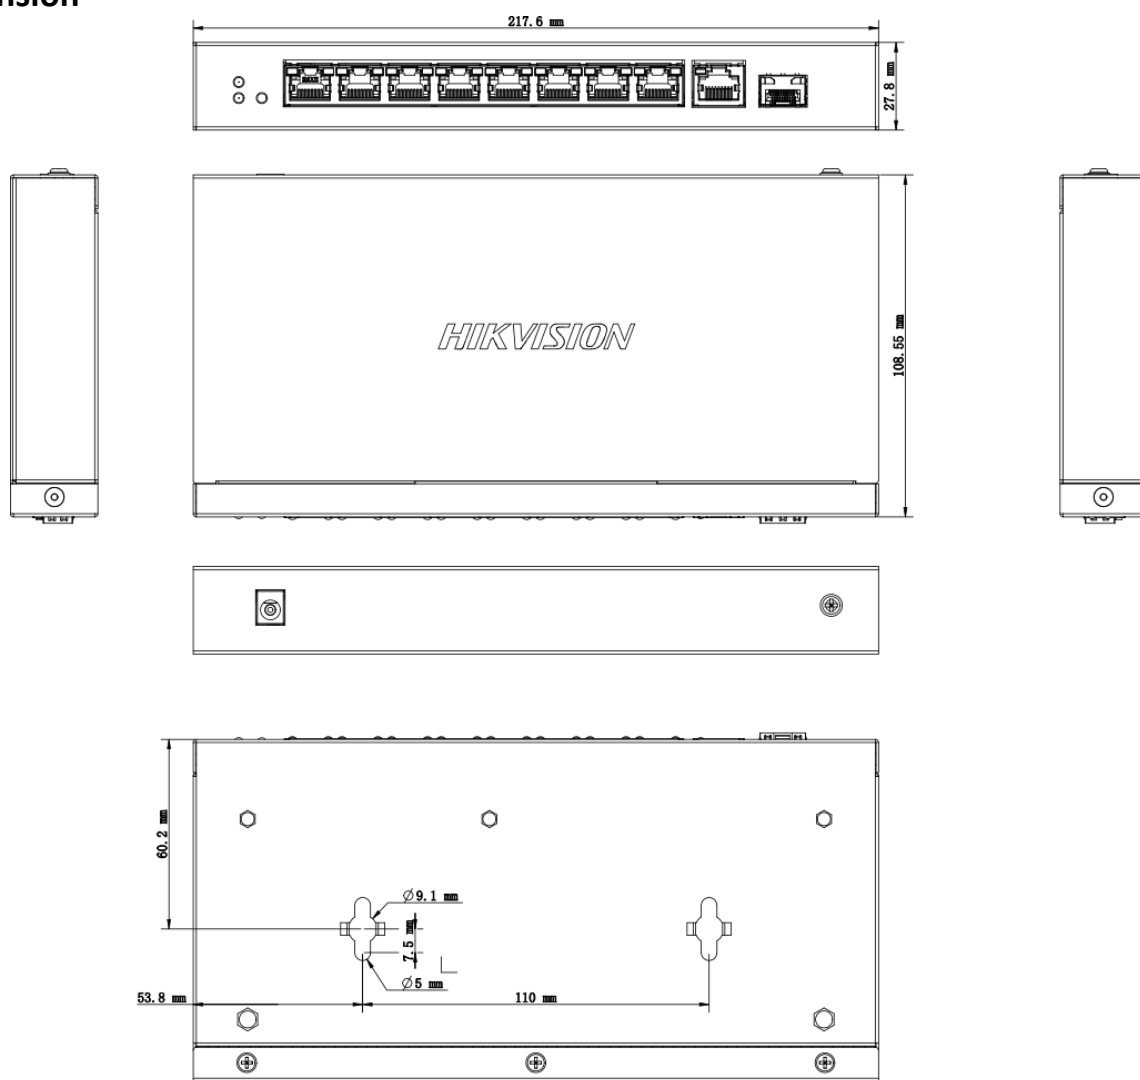
## ▪ Specification

Model		DS-3E0510P-E/M
<b>Network Parameters</b>	Ports	8 × Gigabit PoE port, 1 × Gigabit RJ45 port, 1 × Gigabit fiber optical port
	MAC Address Table	4 K
	Switching Capacity	20 Gbps
	Packet Forwarding Rate	14.88 Mpps
	Internal Cache	1.5 Mbits
<b>PoE Power Supply</b>	PoE Standard	IEEE 802.3af; IEEE 802.3at
	PoE Power Pin	End-span: 1/2(+), 3/6(-)
	PoE Port	PoE: Ports 1 to 8
	Max. Port Power	30 W
	PoE Power Budget	58 W
<b>General</b>	Shell	Metal material
	Net Weight	0.635 kg (1.40 lb)
	Gross Weight	1.366 kg (3.01 lb)
	Dimensions (W × H × D)	217.6 mm × 27.8 mm × 108.55 mm (8.6" × 1.1" × 4.3")
	Operating Temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Operating Humidity	5% to 95% (no condensation)
	Relative Humidity	5% to 95% (no condensation)
	Power Supply	48 V DC, 1.35 A
	Max. Power Consumption	65 W
	Power Consumption in Idle	7 W
	Installation Mode	Desk-Mounted, Wall-Mounted
	Surge Protection	6 kV
<b>Approval</b>	EMC	FCC (47 CFR Part 15, Subpart B), CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020), IC (ICES-003: Issue 7:2020), RCM (AS/NZS CISPR 32: 2015)
	Safety	UL (UL 60950-1), CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
	Chemistry	CE-RoHS (201165EU); WEEE (201219EU); Reach (Regulation (EC) No.19072006)





## ▪ Available Model

DS-3E0510P-E/M

▪ Dimension



**▪ Accessory****▪ Optional**

HK-SFP-1.25G-20-1550 SFP Module	HK-SFP-1.25G-20-1310 SFP Module	HK-SFP-1.25G-1310-DF- MM SFP Module	HK-SFP-1.25G-20-1310- DF SFP Module
			

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global

Hikvision  
Corporate Channel

hikvisionhq