



IPY-D381203LDS2

12MP Smart Dual Light Two Way Audio SD slot Turret IP POE Camera
Moto Lens



■ Features

- 1/2.3" CMOS sensor
- 12MP HD resolution 4000×3000 realtime output
- Ultra low illumination 0.01Lux
- Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- D-WDR, Motion Detection, Privacy Mask, Flip
- RTSP and Onvif 17.06 compatible
- H.265/H.264 dual-stream media server
- Easy-to-use P2P Cloud service
- Multi web browser, PC Client, mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 4 pcs IR&warm-light Led, IR distance 30-40 meters
- 3X: 3.6 -10 mm AF lens





■ Specification

Camera

Image Sensor	1/2.3" 12MP CMOS
Effective Pixels	4000×3000
Electronic Shutter	AUTO/Manual: 1/10s ~ 1/10000s, shutter threshold
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC/HLC	Support
DNR	2D/3DDNR
Light Control	Auto/Manual, Mode switch, Brightness level, OFF, Light ON Illumination
License Plate Mode	Yes
Other	Multi-lines OSD,Custom Title,Privacy Mask, Flip, Reset button, SD slot

Encode

Video Standard	H.264/H.265/H.265+/MJPEG
Video Resolution	Main Stream:30fps@12MP(4000x3000)/3840x2160/3072x1728/2592x1944/2560x1440/2304x1296/1920x1080/1280x720Sub Stream:30fps@720x480/VGA(640x480)/640x360,480x360,CIF(352x288)
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes, Audio Echo Cancellation
Built-in Speaker	Yes, Two-way audio
OSD Overlay	Title and Time overlay, Snapshot

Smart Detection

Motion Detection	Support
Target Detection	Human, vehicle, non-motor vehicle

Led

IR Led	4 pcsIR&Warm-light dual-wick Led
IR Distance	30-40 M (红外40米, 白光30米)

Lens

Focal length	3X: 3.6 -10 mm AF lens
--------------	------------------------

Language

English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, etc.

Network Services

Protocol	HTTP(s)/RTSP/FTP/NFSv3/SMTP/DHCP/NTP/RTMP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible

General

Network Port	1-RJ45, 100Mbps,POE 802.3af/at 48V
Power Supply	12 VDC ± 10%
Power Consumption	<10W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

* Product specifications may change without prior notice.






IPY-D381203LDS2

12MP Moto Lens Smart Dual Light Two Way Audio SD slot Turret IP POE Camera

■ Available Model

IPY-D381203LDS2

■ Dimension

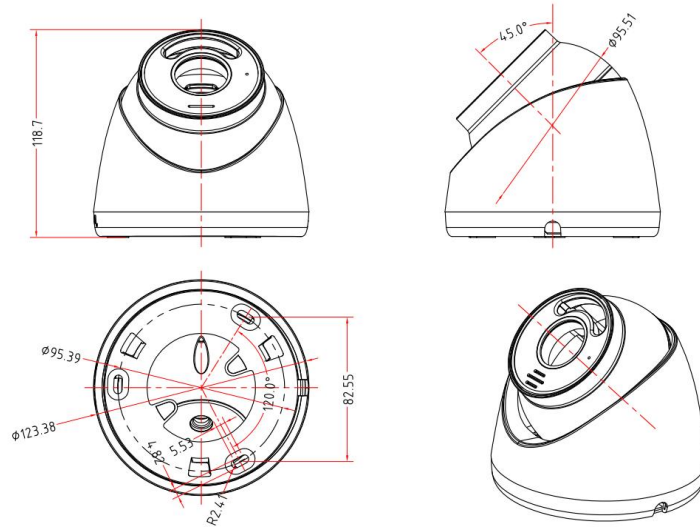

■ Accessory

■ Optional



Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

48F, Block 1, Gemini Office Building, Diyicheng, Qicai Yunnan, Kunming, Yunnan, China

