

IDS-E08HQHI-B 8-ch 2 MP 1U H.265 eSSD AcuSense DVR

Key Feature

- Powered by eSSD technology
- Deep learning based human and vehicle targets classification of Motion Detection 2.0 and perimeter protection
- Scene-adaptive bitrate control video compression
- Up to 3K/5 MP Lite@12 fps encoding capability
- Low power consumption
- Audio via coaxial cable



Built-In SSD

- Minimalist eSSD design brings low power consumption
- Integrated storage design provides the plug-and-play device use

Easy Installation

- Mini size design saves installation space
- Anti-vibration design and light weight satisfy more installation conditions

Compression and Recording

- Scene-adaptive bitrate control technology would precisely allocate videos in eSSD according to the actual scene
- Full channel recording at up to 3K/5 MP Lite resolution

Smart Function

- Deep learning-based motion detection 2.0
- Deep learning-based perimeter protection
- Smart search for efficient playback

▪ Specification


Motion Detection 2.0	
Human/Vehicle Analysis	<p>Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights;</p> <p>Quick search by object or event type is supported;</p>
Perimeter Protection	
Human/Vehicle Analysis	Up to 8-ch
Recording	
Video Compression	H.265 Pro/H.265
Encoding Resolution	<p>When 1080p Lite mode is not enabled: 5 MP Lite/3K/4MP Lite/1080p/1080p Lite/720p/WD1/4CIF;</p> <p>When 1080p Lite mode is enabled: 5 MP/3K Lite/4MP Lite/1080p Lite/720p/WD1/4CIF;</p>
Frame Rate	<p>Main stream:</p> <p>When 1080p Lite mode not enabled:</p> <p>For 5 MP stream access: 5 MP Lite@12 fps; 4 MP Lite/1080p@15 fps; 720p/WD1/4CIF/VGA/CIF@20 fps</p> <p>For 1080p stream access: 1080p/720p@15 fps; WD1/4CIF@25 fps (P)/30 fps (N)</p> <p>For 720p stream access: 720p/WD1/4CIF@25 fps (P)/30 fps (N)</p> <p>When 1080p Lite mode enabled: 5 MP/3K Lite@12 fps; 4 MP Lite/@15 fps; 1080p Lite/720p/WD1/4CIF@25 fps (P)/30 fps (N)</p>
Video Bitrate	According to the actual scene, scene-adaptive bitrate control technology would automatically allocates appropriate bitrate to ensure the stability of recording period.
Stream Type	<p>Video, Video & Audio</p> <p>Note: In order to protect privacy, the device will only record video (without audio) by default. If you want to record audio, you shall manually enable audio recording. For operation details, refer to the user manual.</p>
Audio Compression	G.711u
Audio Bitrate	64 Kbps
Video and Audio	
IP Video Input	<p>2-ch</p> <p>Up to 6 MP resolution</p> <p>Support H.265+/H.265 IP cameras</p>

Analog Video Input	8-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDTVI Input	3K@20 fps, 5 MP@20 fps, 4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps, 720p50, 720p60
AHD Input	5 MP@20 fps, 4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps
HDCVI Input	5 MP@20 fps, 4 MP@30 fps, 4 MP@25 fps, 1080p@30 fps, 1080p@25 fps, 720p@30 fps, 720p@25 fps
CVBS Input	Support
VGA Output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz
HDMI Output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz
Video Output Mode	HDMI/VGA simultaneous output
Audio Input	8-ch via coaxial cable
Audio Output	1-ch via HDMI
Synchronous Playback	4-ch
Network	
Total Bandwidth	96 Mbps Incoming bandwidth: 8 Mbps
Remote Connection	64
Network Protocol	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, UPnP™, HTTPS
Network Interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface
Auxiliary Interface	
Capacity	Built-in 1024 GB eSSD (960 GB available) Note: The device can store about 2 weeks videos for 8-ch analog cameras (default parameters), this estimation is for reference only.
Alarm In/Out	N/A
USB Interface	Rear panel: 2 × USB 2.0
General	
Power Supply	12 VDC, 1 A
Consumption	≤ 8.2 W (with eSSD)
Working Temperature	-10 °C to 45 °C (14 °F to 113 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	170 × 121.6 × 46 mm (6.7 × 4.79 × 1.81 inch)
Weight	≤ 0.5 kg (with eSSD, 1.1 lb.)

Note:


Analog and IP signal input types are not configurable, and analog channel cannot be disabled to increase the maximum accessible number of network cameras.

Physical Interface

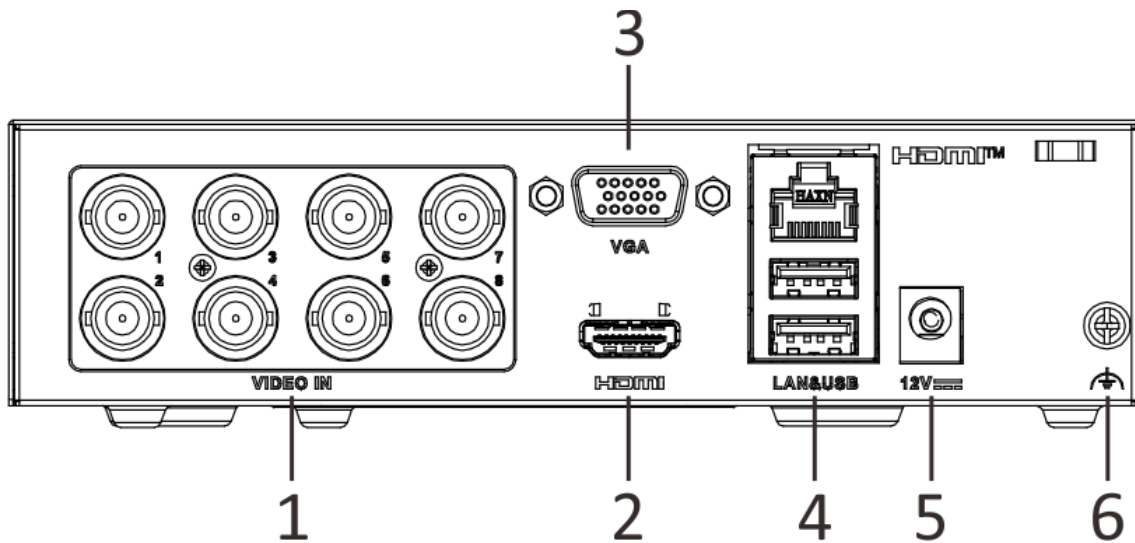

No.	Description	No.	Description
1	Video and coaxial audio in	4	LAN network interface and USB interface
2	HDMI interface	5	Power supply
3	VGA interface	6	GND

Dimension

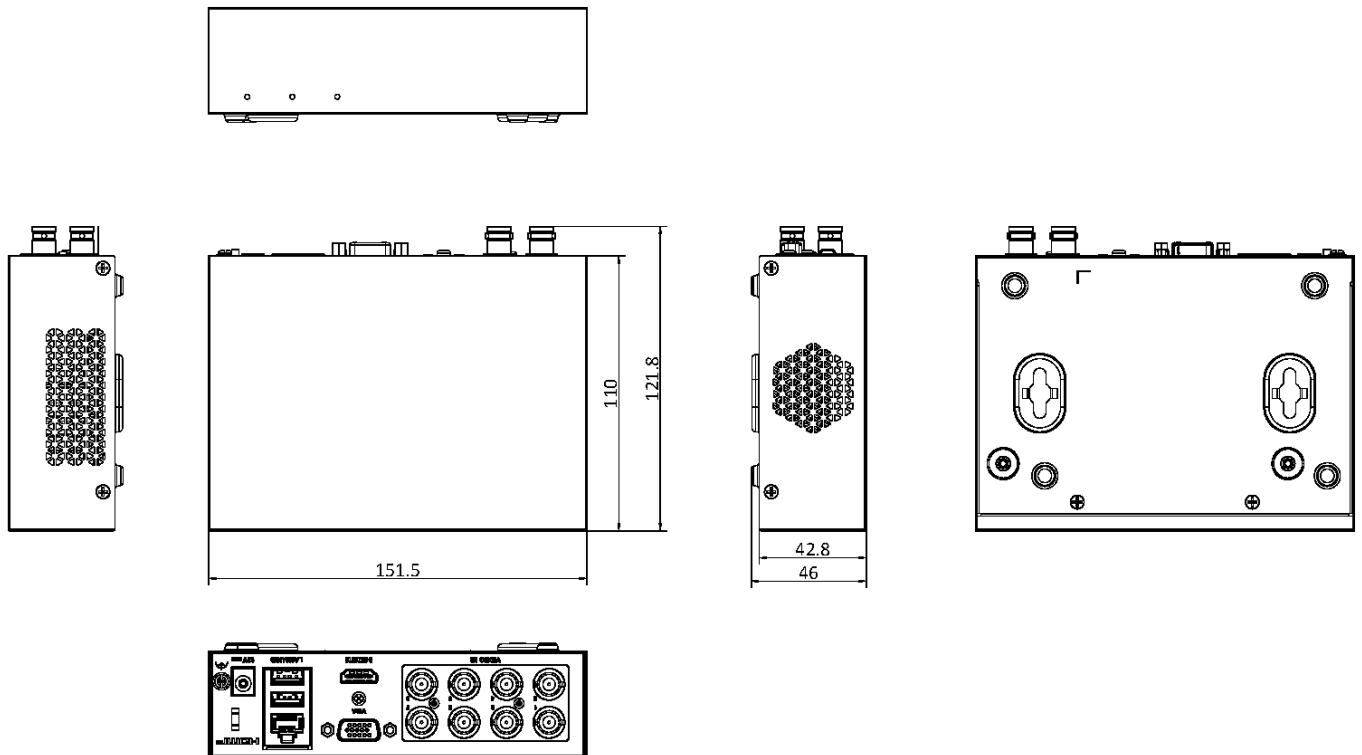

Scale 1:1 Unit: mm

Available Model

iDS-E08HQHI-B

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

