IPY-B915LDS2-AISP-RB



5 MP Red&Blue Flashlight Alarm Face Detection VCA AI Human & Vehicle Detection AI-ISP Super Color Nightview PoE Bullet IP Camera



Features

- 24/7 colorful imaging
- 1/1.8" 5MP SmartSens SC465SL CMOS
- 5MP resolution 2880(H) × 1620 (V)
- Face Detection,Human&Vehicle Detection, Line Crossing, Area Entry/Leaving Detection, Area Intrusion Detection
- Min. illumination Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Warm light on
- D-WDR ,Day/Night, AWB/MWB, 2D/3D-DNR
- Motion Detection, Privacy Mask,Image Mirror,ROI
- RTSP and Onvif 23.12 Compatible
- H.265/ H.264 Dual-stream Media Server
- Easy-to-use P2P Cloud Service
- Multi web browser, PC Client, Mobile APP, Remote access
- RJ45 100mbps Network Port, IEEE802.3af PoE
- Lightning Protection 4000V
- Strong Water-proof Housing, IP67
- 2 pcs Warm Light Led, Light distance 20-30 meters
- 1 - Red led and 1 blue led for alarm flashing

IPY-B915LDS2-AISP-RB

5 MP Red&Blue Flashlight Alarm Face Detection VCA AI Human & Vehicle Detection AI-ISP Super Color Nightview PoE Bullet IP Camera

Specification

Camera	
Image Sensor	1/1.8" 5MP SmartSens SC465SL CMOS
Soc Chip	Sigmastar SSC387DE
Effective Pixels	2880(H) × 1620 (V)
Exposure Shutter	AUTO/Manual: 1/10s ~ 1/8000s, Max Shutter speed adjustable
Day/Night	Auto(Active/passive/schedule)/Day/Night, switch threshold, sensitivity, anti-flicker(Auto/50Hz/60Hz)
Image Adjust	Brightness,Saturation,Sharpness,Contrast,Denoise (0-100%) adjustable
White Balance	AWB/MWB
WDR	D-WDR
Light Control	Auto/Manual, Brightness level (0-100%) adjustable
DNR	2D/3D DNR
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps@5MP(2880x1620)(default)/4MP(2560x1440)/3MP(2304x1296),30fps@1080P/720P Sub stream: 10fps@720P,25fps@D1(704x576)(default)/(720x480)/VGA(640x480)/QVGA(640x360)
Video Bitrates	Main stream: 64kbps-8Mbps Sub stream: 64kbps-2048kbps VBR/CBR , quality(1-9), GOP(1-128)
Image Snapshot	Main stream(HD)/Sub Stream(SD) snapshot
Image Rotation	No
Border Crop	X crop, Y crop
Image Mirror	horizon / vertical / horizon&vertical adjustable
OSD Overlay	Font size(1-4), position,Time, Title, AM/PM, Color, User OSD, Alarm OSD
Privacy Mask	4 areas
Region of Interest	ROI: Each stream support 8 areas
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes
Built-in Speaker	Yes, two way audio
LED and Distance	
LEDs	2 pcs Warm Light Led, 1pc Red&1PC Blue LED
Light Distance	20-30M

* Product specifications may change without prior notice.

IPY-B915LDS2-AISP-RB

5 MP Red&Blue Flashlight Alarm Face Detection VCA AI Human & Vehicle Detection AI-ISP Super Color Nightview PoE Bullet IP Camera

Specification

Lens	
Focal length	2.8mm F1.0 Starlight Lens
Language	
English, simplified Chinese, Chinese Traditional, Japanese, Korean, German, Polish, Italian, Turkish, Ukraine, Russian, etc.	
Smart Detection	
Motion Detection	Yes
Digital IO Alarm	
Human Vehicle Detection	Yes, (2-20 meters)
Cross Line Detection	Yes, 4 lines
Perimeter protection	Yes, 4 areas
Face Detection	Yes, (1-5 meters)
Target Detection Type	Human Shape, vehicle, non-motor vehicle, Pet, Face (12px-1000px)
Trigger Action Linkage	Snapshot, Record, Red-blue Led Flash, Voice siren, Micro-SD, Email, FTP, NAS storage (NFS)
Simultaneous Detection	Maximum 16 targets simultaneous detection
Storage Type	Schedule/Trigger: Micro-SD(512G) , Email, FTP, NAS(NFS)
Network Services	
Protocol	HTTP(s)/RTSP/FTP/SMTP/DHCP/NTP/DST/RTP/RTMP/P2P/HiK/IPv4/IPv6/NFS/DDNS
IP Address Filtering	Yes (Allow list, Deny list)
P2P Mobile APP	Android, IOS
Web Access	IE, Firefox, Chrome, Edge, Safari, etc. (Windows/Linux/Mac/Chromebook/Tablet/Mobile phone)
PC Tool	Windows, Mac
ONVIF	23.12 compatible (profile S G T M)
General	
Network Port	1-RJ45, 100Mbps, POE(IEEE802.3af)
Power Supply	12 VDC ± 10%
Power Consumption	< 8 W
Operating Temp.	-20℃-(+60)℃, 10%-90%RH

* Product specifications may change without prior notice.


IPY-B915LDS2-AISP-RB

5 MP Red&Blue Flashlight Alarm Face Detection VCA AI Human & Vehicle Detection AI-ISP Super Color Nightview PoE Bullet IP Camera

Available Model

IPY-B915LDS2-AISP-RB IPY-B918LDS2-AISP (2.8/3.6mm)

Dimension

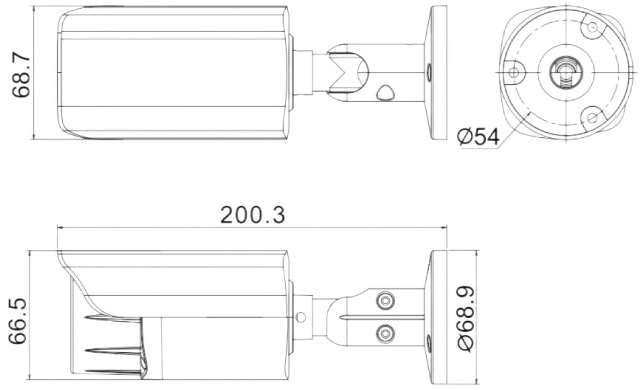

Accessory

Optional

	JB-06
	

Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China