
IPY-B92803LDS2-AISP



8 MP Motorized Lens Face Detection VCA AI Human & Vehicle Detection AI-ISP Super Color Nightview PoE Bullet IP Camera

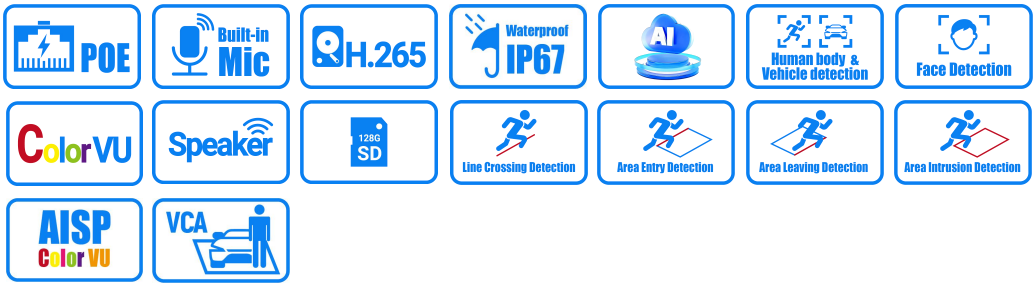

Features

- 24/7 colorful imaging
- 1/1.8" 8MP SmartSens SC850SL CMOS
- 4K resolution 3840 x 2160P
- Face Detection,Human&Vehicle Detection, Line Crossing, Area Entry/Leaving Detection, Area Intrusion Detection
- Min. illumination Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with Warm light on
- D-WDR ,Day/Night, AWB/MWB, 2D/3D-DNR
- Motion Detection, Privacy Mask,Image Mirror,ROI
- RTSP and Onvif 23.12 Compatible
- H.265/ H.264 Dual-stream Media Server
- Easy-to-use P2P Cloud Service
- Multi web browser, PC Client, Mobile APP, Remote access
- RJ45 100mbps Network Port, IEEE802.3af PoE
- Lightning Protection 4000V
- Strong Water-proof Housing, IP67
- 4PCS Soft & Warm Supplemental Lights, Light Distance 40-50M
- 4-10mm Motorized Lens
- Built-in Microphone optional

IPY-B92803LDS2-AISP

8 MP Motorized Lens Face Detection VCA AI Human & Vehicle Detection
AI-ISP Super Color Nightview PoE Bullet IP Camera

Specification

Camera	
Image Sensor	1/1.8" 8MP SmartSens SC850SL CMOS
Soc Chip	Sigmastar SSC387DE
Effective Pixels	3840(H) × 2160 (V)
Exposure Shutter	AUTO/Manual: 1/10s ~ 1/8000s, Max Shutter speed adjustable
Day/Night	Auto(Active/passive/schedule)/Day/Night, switch threshold, sensitivity, anti-flicker(Auto/50Hz/60Hz)
Image Adjust	Brightness,Saturation,Sharpness,Contrast,Denoise (0-100%) adjustable
White Balance	AWB/MWB
WDR	D-WDR
Light Control	Auto/Manual, Brightness level (0-100%) adjustable
DNR	2D/3D DNR
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 20fps@8MP(3840x2160)(default),25fps@6MP(3072x2048)/5MP(2592x1944)/4MP(2560x1440)/3MP (2304x1296),30fps@1080P/720P Sub stream: 10fps@720P,25fps@D1(704x576)(default)/(720x480)/VGA(640x480)/QVGA(640x360)
Video Bitrates	Main stream: 64kbps-8Mbps Sub stream: 64kbps-2048kbps SSC387DE+SC465SL support 3 stream VBR/CBR , quality(1-9), GOP(1-128)
Image Snapshot	Sub Stream(SD) snapshot
Image Rotation	No
Border Crop	X crop, Y crop
Image Mirror	horizon / vertical / horizon&vertical adjustable
OSD Overlay	Font size(1-4), position,Time, Title, AM/PM, Color, User OSD, Alarm OSD
Privacy Mask	4 areas
Region of Interest	ROI: Each stream support 8 areas
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes
LED and Distance	
LEDs	4pcs Soft & Warm Supplemental Lights
Light Distance	40-50M
Lens	
Focal length	4-10mm Motorized Lens / 3.6-10mm D:147.67 ° (W)-54.94 ° (T); H:108.39 ° (W) 44.43 ° (T); V:74.57 ° (W)- 32.19 ° (T)
Language	
English, simplified Chinese, Chinese Traditional, Japanese, Korean, German, Polish, Italian, Turkish, Ukraine, Russian, etc.	

* Product specifications may change without prior notice.

IPY-B92803LDS2-AISP

8 MP Motorized Lens Face Detection VCA AI Human & Vehicle Detection
AI-ISP Super Color Nightview PoE Bullet IP Camera

Specification

Smart Detection	
Motion Detection	Yes
Digital IO Alarm	
Human Vehicle Detection	Yes, (2-20 meters)
Cross Line Detection	Yes, 4 lines
Perimeter protection	Yes, 4 areas
Face Detection	Yes, (1-5 meters)
Target Detection Type	Human Shape, vehicle, non-motor vehicle, Pet, Face (12px-1000px)
Trigger Action Linkage	Snapshot, Record, White LED Flash, Email, FTP, NAS storage (NFS)
Simultaneous Detection	Maximum 16 targets simultaneous detection
Storage Type	Schedule/Trigger: Email, FTP, NAS(NFS)
Network Services	
Protocol	HTTP(s)/RTSP/FTP/SMTP/DHCP/NTP/DST/RTP/RTMP/P2P/HiK/IPv4/IPv6/NFS/DDNS
IP Address Filtering	Yes (Allow list, Deny list)
P2P Mobile APP	Android, IOS
Web Access	IE, Firefox, Chrome, Edge, Safari, etc. (Windows/Linux/Mac/Chromebook/Tablet/Mobile phone)
PC Tool	Windows, Mac
ONVIF	23.12 compatible (profile S G T M)
General	
Network Port	1-RJ45, 100Mbps, POE(IEEE802.3af)
Power Supply	12 VDC ± 10%
Power Consumption	< 8 W
Operating Temp.	-20℃-(+60)℃, 10%-90%RH

* Product specifications may change without prior notice.


IPY-B92803LDS2-AISP

8 MP Motorized Lens Face Detection VCA AI Human & Vehicle Detection
AI-ISP Super Color Nightview PoE Bullet IP Camera

Available Model

IPY-B92503LDS2-AISP IPY-B92803LDS2-AISP

Dimension

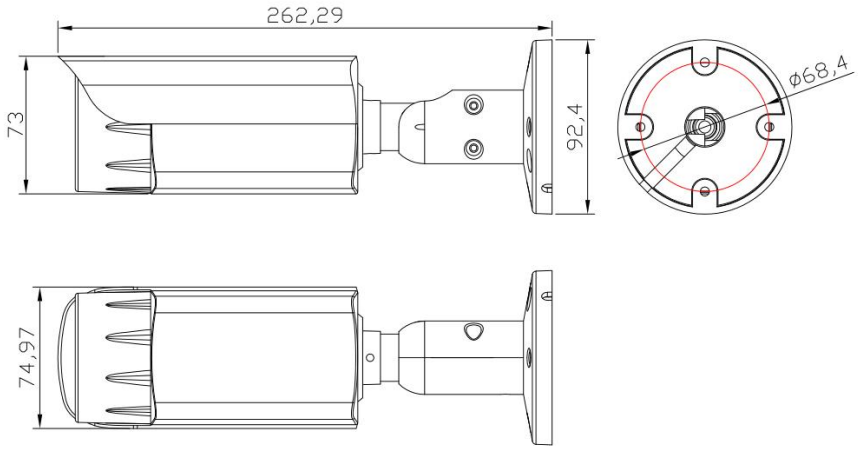

Accessory

Optional

Uin Technology Co., Ltd.
+86-871 63586112
www.uin-tech.com
4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China