
IPY-D25604LDS2



6 MP VCA AI Face Detection Perimeter Function
Dual Light Two-way Audio Motorized Lens PoE IP Camera

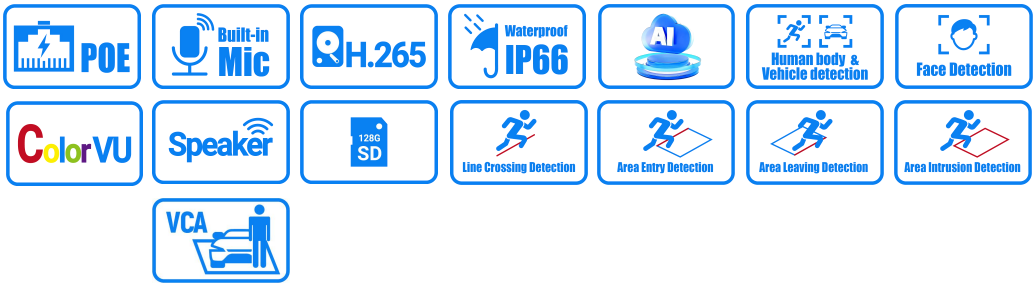

Features

- Dual light IR&warmlight
- 1/2.7" CMOS Sensor
- 6MP HD Resolution Output
- Face Detection,Human&Vehicle Detection, Line Crossing, Area Entry/Leaving Detection, Area Intrusion Detection
- Low illumination 0.01Lux, 0 Lux with Warm light on
- Day/ Night (ICR), AWR, 2D/3D-DNR, IR-CUT
- Motion Detection, Privacy Mask, Flip
- RTSP and Onvif 23.12 Compatible
- H.265/ H.264 Dual-stream Media Server
- Easy-to-use P2P Cloud Service
- Multi web browser, PC Client, Mobile APP, Remote access
- RJ45 100mbps Network Port, IEEE802.3af PoE
- Lightning Protection 4000V
- Strong Water-proof Housing, IP66
- 2PCS IR LED + 2PCS Warm Lighting LEDs, Light Distance:20-30M
- 2.8-12mm Motorized Lens
- Two Way Audio/SD Slot

IPY-D25604LDS2

6 MP VCA AI Face Detection Perimeter Function Dual Light Two-way Audio Motorized Lens PoE IP Camera

Specification

Camera	
Image Sensor	1/2.7" CMOS
Soc Chip	Sigmastar SSC377D
Effective Pixels	3072(H) × 2048 (V)
Exposure Shutter	AUTO/Manual: 1/10s ~ 1/8000s, Max. Shutter speed adjustable
Day/Night	Auto(Active/passive/schedule)/Day/Night, switch threshold, sensitivity
Image Adjust	Brightness,Saturation,Sharpness,Contrast,Denoise (0-100%) adjustable
White Balance	AWB/MWB
Light Mode	Smart(dual-light) / Pure Infrared / Pure White light, adjustable
Light Control	Auto/Manual, Brightness level (0-100%) adjustable
DNR	2D/3D DNR
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps@6MP(3072x2048)(default),30fps@5MP(2592x1944)/4MP(2560x1440)/3MP(2304x1296)/1080P/720P Sub stream: 10fps@720P,30fps@D1(704x576)(default)/(720x480)/VGA(640x480)/QVGA(640x360)
Video Bitrates	Main stream: 64kbps-8Mbps Sub stream: 64kbps-2048kbps VBR/CBR , quality(1-9), GOP(1-128)
Image Rotation	0 / 90 / 180 / 270 degree adjustable
Border Crop	X crop, Y crop
Image Mirror	horizon / vertical / horizon&vertical adjustable
OSD Overlay	Font size(1-4), position,Time, Title, AM/PM, Color, User OSD, Alarm OSD
Privacy Mask	4 areas
Region of Interest	ROI: Each stream support 8 areas
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes
Built-in Speaker	Yes
Led	
Light	2PCS IR LED + 2PCS Warm Lighting LEDs
Light Distance	20-30M
Lens	
Focal length	2.8-12mm Motorized Lens

* Product specifications may change without prior notice.

IPY-D25604LDS2

6 MP VCA AI Face Detection Perimeter Function Dual Light Two-way Audio Motorized Lens PoE IP Camera

Specification

Language	
English, simplified Chinese, Chinese Traditional, Japanese, Korean, German, Polish, Italian, Turkish, Ukraine, Russian, etc.	
Smart Detection	
Motion Detection	Yes
Digital IO Alarm	
Human & Vehicle Detection	Yes, (2-20 meters)
Cross Line Detection	Yes, 4 lines
Perimeter protection	Yes, 4 areas
Face Detection	Yes, (1-5 meters)
Target Detection Type	Human Shape, vehicle, non-motor vehicle, Pet, Face (12-1000 pixel)
Trigger Action Linkage	Snapshot, Record, Relay, White LED Flash, Voice siren, Micro-SD, Email, FTP, NAS storage (optional)
Simultaneous Detection	Maximum 16 targets simultaneous detection
Storage Type	Schedule/Trigger: Micro-SD(512G) , Email, FTP, NAS
Network Services	
Protocol	HTTP(s)/RTSP/FTP/SMTP/DHCP/NTP/DST/RTP/RTMP/P2P/HiK/IPv4/IPv6/NFS
P2P Mobile APP	Android, IOS
Web Access	IE, Firefox, Chrome, Edge, Safari, etc.
PC Tool	Windows, Mac
ONVIF	23.12 compatible (profile S G T M)
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 8 W
Operating Temp.	-20℃-(+60)℃, 10%-90%RH

* Product specifications may change without prior notice.


IPY-D25604LDS2

6 MP VCA AI Face Detection Perimeter Function Dual Light Two-way Audio Motorized Lens PoE IP Camera

Available Model

IPY-D25604LDS2

Dimension

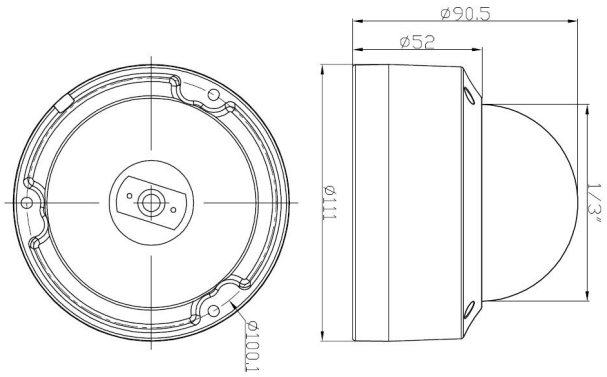

Accessory

Optional

JZ-03	JB-07
	

Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China